

# Profile Knob Cylinder, 35mm/50mm

Part number: CL-PK3550






The CyberLock Profile Knob, 35mm/50mm, is a direct replacement for the standard 35mm/50mm European profile. It is a single keyway with knob and measures 35mm from the center of the mounting hole to the outside keyway and 50mm from the center of the mounting hole to the base of the knob.

Both the lock body and the locking cam are made of nickel-plated brass. The electronics are encased in a stainless steel shell. The cylinder contains two hardened steel pins as an anti-drilling feature. The inner knob is clutched to override the external keyway.

CyberLock cylinders have several advantages over traditional cylinders:

- Keys cannot be duplicated.
- The lock has no keyway to pick.
- Various entry times and restrictions can be set.
- Both the locks and keys track all actions.

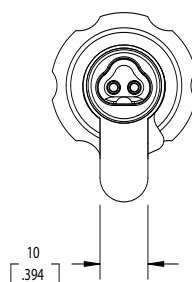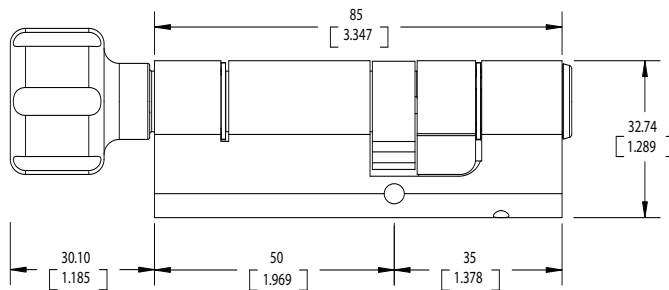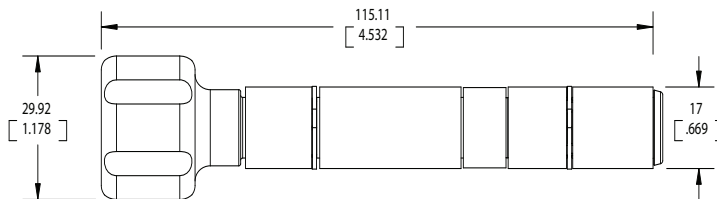

Notes:  
Dimensions in mm (inches)  
Drawing not to scale

# Profile Knob Cylinder, 35mm/50mm

Part number: CL-PK3550

## Specifications

<b>Finish</b>	<ul style="list-style-type: none"> <li>• Face – Stainless steel</li> <li>• Body – Nickel plating</li> </ul>
<b>Operating Temperature</b>	<ul style="list-style-type: none"> <li>• -40° to 160° F; -40° to 70° C, non-condensing</li> </ul>
<b>Power Requirements</b>	<ul style="list-style-type: none"> <li>• None; power is supplied by the key's battery.</li> </ul>
<b>Hardware Security Features</b>	<ul style="list-style-type: none"> <li>• No keyway to pick.</li> <li>• If torque is applied to the front of the cylinder, it separates from the back half leaving the cylinder in the locked position.</li> <li>• Resists electric charge applied to the face of the lock.</li> <li>• Drill-resistant pins.</li> </ul>
<b>Number of Keys per Lock</b>	<ul style="list-style-type: none"> <li>• No limit to the number of keys that the lock can support.</li> </ul>
<b>Number of Locks per Key</b>	<ul style="list-style-type: none"> <li>• Up to 3300 locks can be accessed with a standard user key.</li> <li>• A Master key has no limit to the number of locks it can access.</li> </ul>
<b>Lost Keys</b>	<ul style="list-style-type: none"> <li>• The system can designate and disable lost keys.</li> </ul>
<b>Access Schedules</b>	<ul style="list-style-type: none"> <li>• Schedules programmed into the CyberKey provide complete control over specific days and times that a key will operate. A key can use up to 49 different schedules to access locks.</li> <li>• A database has no limit to the number of schedules it can manage.</li> <li>• Holidays may be set as exceptions to the schedules.</li> </ul>
<b>Audit Capacities</b>	<ul style="list-style-type: none"> <li>• The lock remembers the last 1100 events with date and time.</li> <li>• A key remembers up to 3900 events with date and time. It can be set to keep only the most recent set of events or to stop operating when its audit trail is full.</li> </ul>
<b>Electronic Security Features</b>	<ul style="list-style-type: none"> <li>• Key expiration – a begin/end date range can be set during which the key will work.</li> <li>• Delayed entry – a lock can be set to delay entry for up to 20 minutes.</li> <li>• Multiple key custody – a lock may be set to require more than 1 key (up to 4) before opening.</li> </ul>
<b>Electronic Rekeying</b>	<ul style="list-style-type: none"> <li>• Rekeying a system is done via the software; no need to install new locks and issue new keys.</li> </ul>